
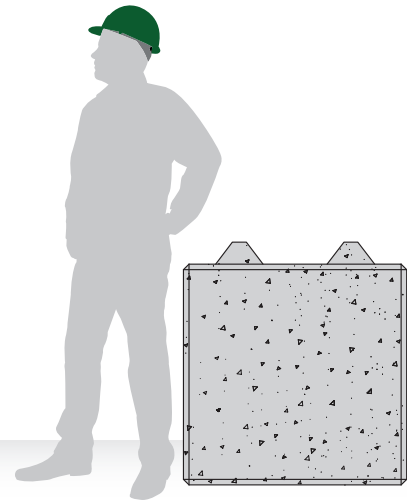


Poundfield's popular interlocking building block, which provides a highly flexible construction system.

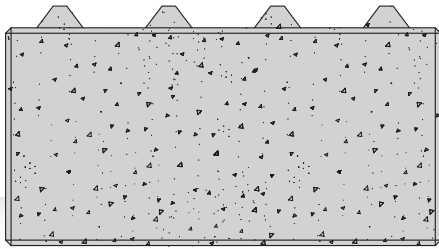

Height	800mm	800mm
Length	1600mm	800mm
Depth	800mm	800mm
Weight	2.40 tonnes	1.20 tonnes

## Summary

Solid concrete interlocking blocks are ideal for both temporary and permanent structures. They're easy to stack, move and relocate, making them perfect for constructing storage areas, partition walls, perimeter or retaining walls, or to use in areas such as landscaping, flood defences or site security barriers.

With 2 cast in lifting points, the units are quick to install and once in place the wall is immediately ready for use; the only real requirement prior to installation is to have a sound and level base.

Betaloc® XL's are made of solid concrete and weigh approximately 2.4 tonnes. We also produce a half unit allowing for a flush finish if required, which is 800mm in width.

We recommend a maximum height of 3-4 bricks dependent on use.

- Ideal retaining wall system
- Rapid and flexible construction
- Lightweight
- Easy installation
- Immediately useable
- Expandable and moveable
- Permanent and temporary applications

