


Robust and efficient, the **T3** beam is used for traditional beam and block flooring and EPS floors.

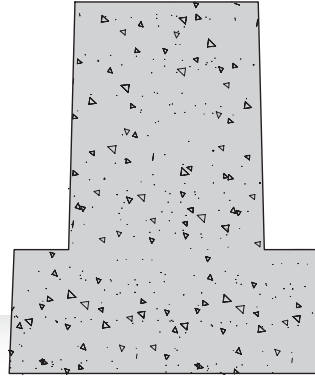

| | SINGLE 522 | ALTERNATE 410 | NARROW 297 |
|-----------------------|----------------|---------------|------------|
| 1.50kN/m ² | 4120 | 4608 | 5316 |
| 2.5kN/m ² | 3764 | 4219 | 4884 |
| 4.0kN/m ² | 3366 | 3782 | 4395 |
| Height | 150mm | | |
| Width | 127mm | | |
| Weight | 34kg per metre | | |

Table based on finishes of 1.80kN/m² and 1450kg/m³ medium dense blocks

Summary

Traditional beam & block suspended flooring systems are cost-effective, easy to install and can be laid in all weathers.

Beam & block is an excellent alternative to traditional timber flooring. With excellent sound and thermal insulation properties, as well as fire resistance, this method is suitable for use in domestic and industrial buildings.

We pride ourselves on delivering quality materials in the right way and at the right time. To achieve this we stock a large range of beams in standard sizes, ready to go to sites and builders merchants across the UK.

If different sized beams are required at short notice, our unique, patented, cutting machines allow us to accurately cut to different sizes. This makes our beam & block flooring even more convenient for homebuilders, as our cutting schedules can be changed at short notice, if required, to adapt to changing installation schedules on-site.

- manufactured to 25mm increments
- large stocks available
- CE Mark Accreditation - British Standard EN 15037-1:2008

